
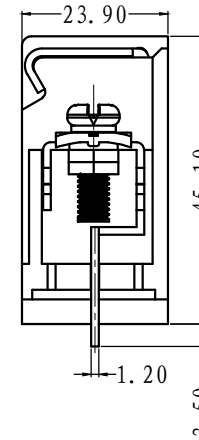
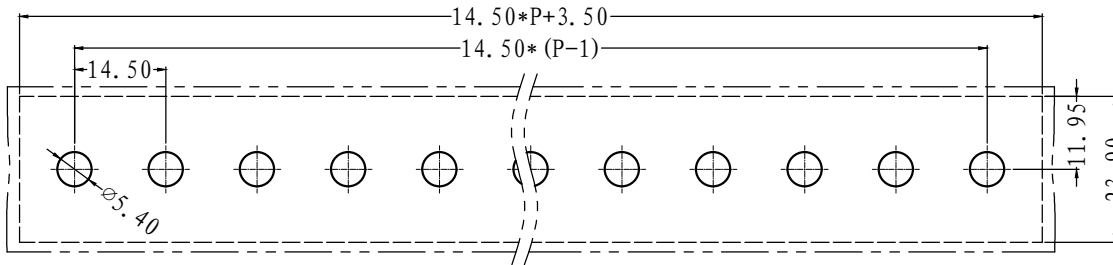
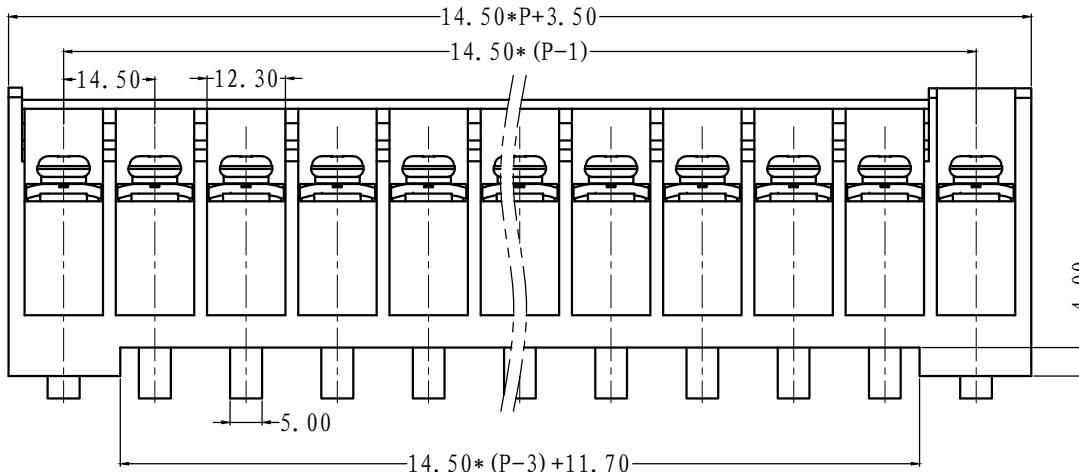


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

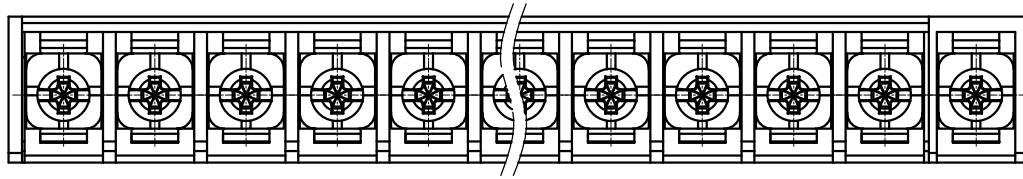

NOTES:  
 Pitch : 14.5mm  
 Rated Voltage : 600V  
 Rated Current : 40 A  
 Withstand Voltage :  
 AC3000V for 1 minute  
 Insulation Resistance :  
 1000MΩ / DC1000V  
 Using Temperature Range :  
 - 40℃ ~ + 130℃  
 Screw Torque Value : 2.0Nm

技术要求:  
 间距: 14.5mm  
 额定电压: 600V  
 额定电流: 40A  
 耐电压值: AC3000V/min  
 绝缘阻抗: 1000MΩ/DC1000V  
 使用条件: -40℃~+130℃  
 螺丝扭矩: 2.0Nm

	pitch dimension			Nominal dimension					— □ ○
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range									
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	外六角螺母	SM00A500001V	1	铁	镀锌
3	GB1450-螺丝	SPFFA808093V	P	碳钢	镀锌
2	GB1450-焊脚	2526B0001AV	P	黄铜	镀雾锡
1	GB1450/1-14.5-XXP-主体	2526A30XXAV-1	1	PBT	黑色
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	WL	DATE	18-09-28	UNITS	MM
CHK.	DATE	SIZE	A4	THIRD ANGLE PROJECTION	
APP.	DATE	SCALE	1:1	DWG NO.	SP-1-DB14501
上海有乐电气有限公司 Shanghai YouLe Electric Co., LTD				TITLE	GB1450/1-14.5-XXP-1Y-00A GB1450/1-14.5-成品